
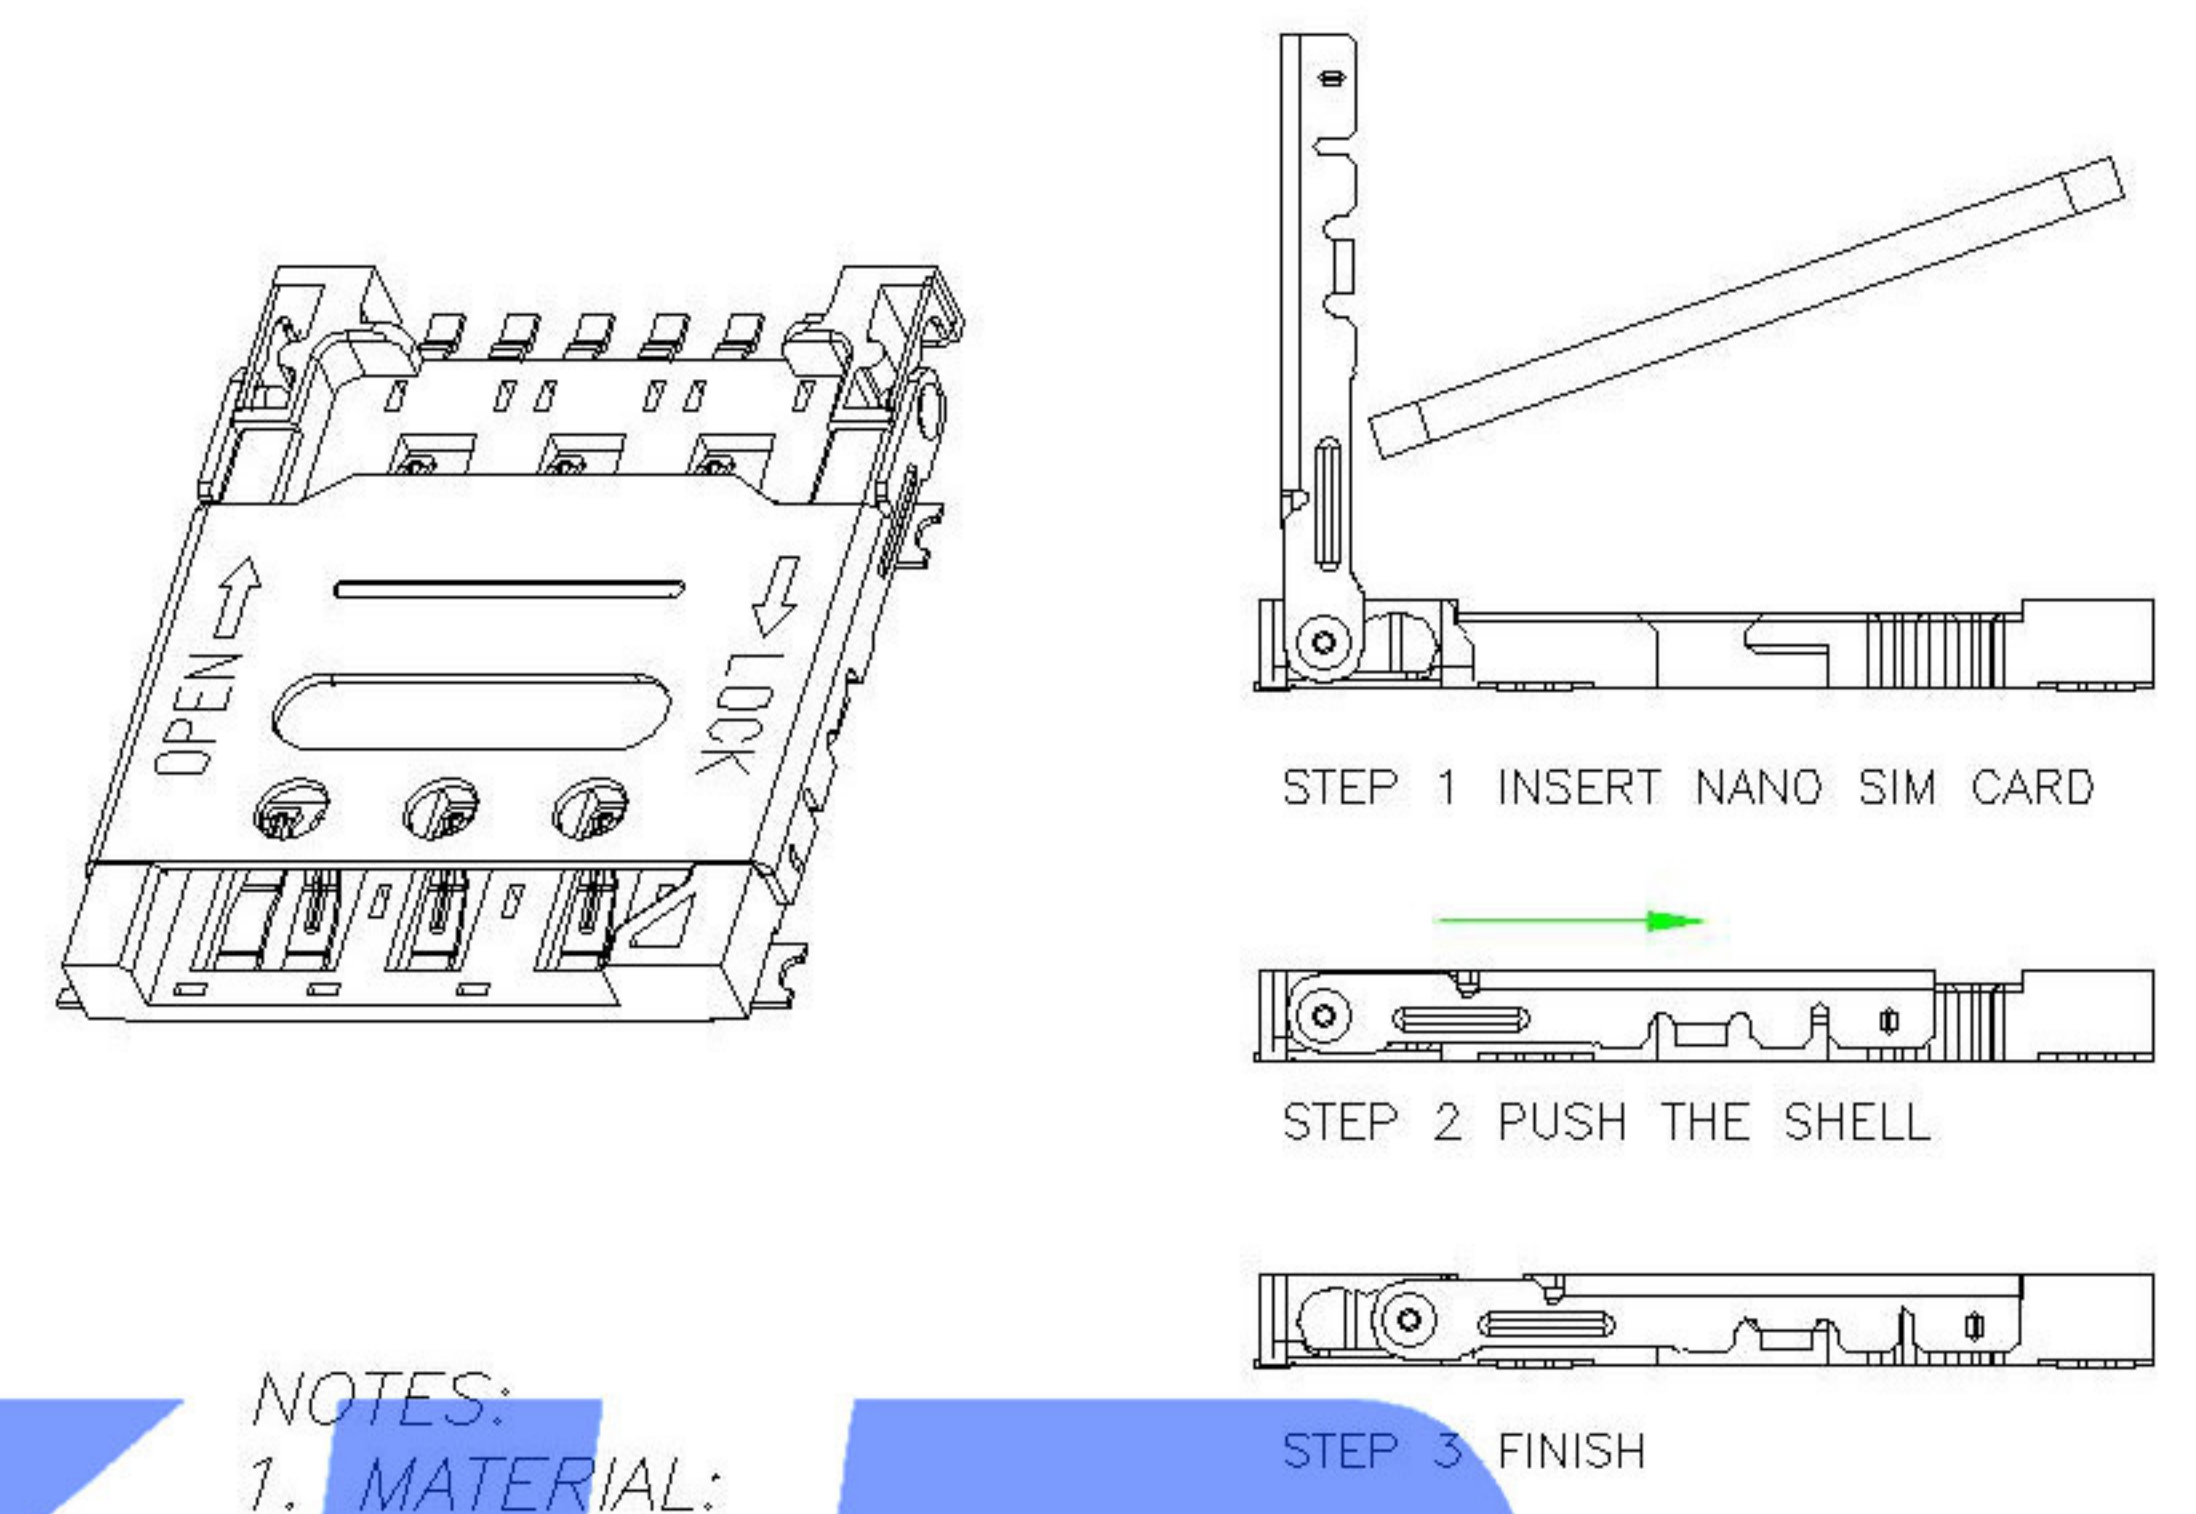


PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

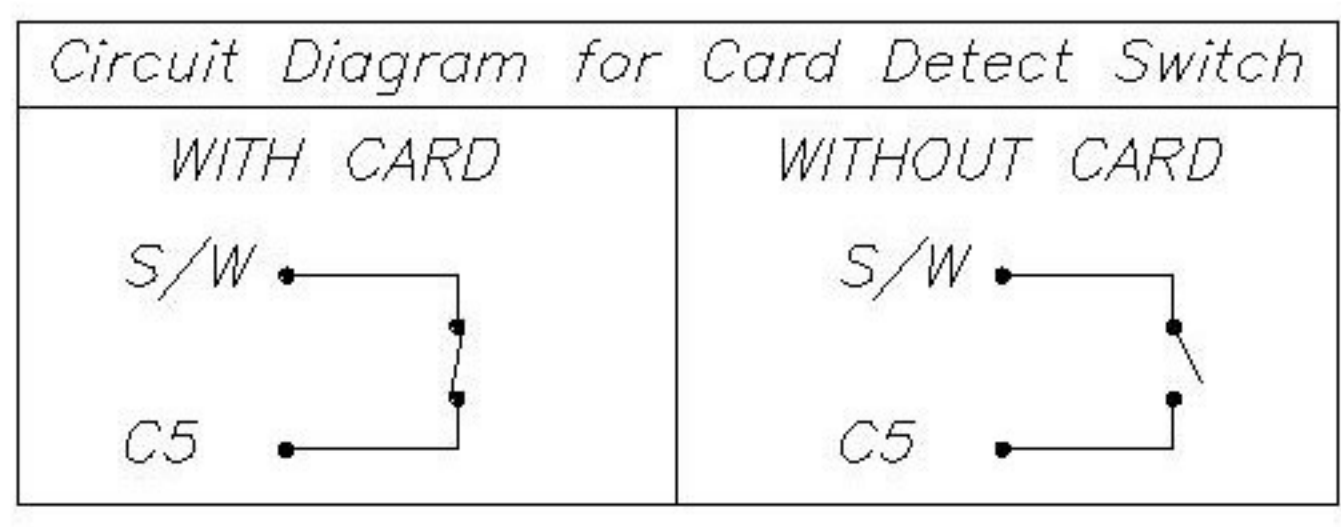

- NOTES:
- MATERIAL:
 - Housing: High Temperature Thermoplastic UL94V-0; Color Black.
 - Terminal: Copper Alloy, T=0.12mm.
 - Shell: Stainless Steel, T=0.20mm.
 - FINISH:
 - Terminal: Plated Gold on the Contact Area and Solder Tails
 - Peg: Plated Gold on the Solder Tails.
 - SPECIALITY:
 - Rated current: 0.5A
 - Rated voltage: 50V
 - Contact Resistance: 50mΩ MAX
 - Insulation Resistance: 100MΩ MIN 100V DC
 - Dielectric withstanding voltage: 100V AC.
 - Durability Cycles: 5000 Cycles.
 - Solder ability: 245±5°C, 5±0.5s.
 - Operating condition: Temperature: -30°C +80°C Humidity: 80% R.H MAX

SWITCH CONNECTOR

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: SIM CARD CONN	
ΔX					ANGLAR ±5°	DWN	DATE	VIEW:	PART NO.:	
ΔX					L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO.:	
ΔX					4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A4	XKNANO-1306	
					16 < L ≤ 63 ±0.4				WEIGHT 1.0g	
					L > 63 ±0.5				SHEET 1/1	
									REVISION A0	
REVISIONS						XKB INDUSTRIAL PRECISION CO., LIMITED				
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn										